

GOLDEN CONTRACTOR SERVICES LLC



Model 6100

Simple sophistication

R-9* Polyurethane Insulation

Variety of Designs

Lifetime Limited Warranty

www.Wayne-Dalton.com



+Ashburn




+Richmond




Somerset




Brunswick

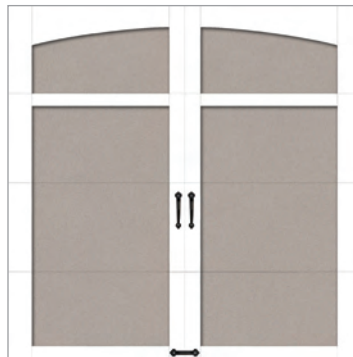


Arlington

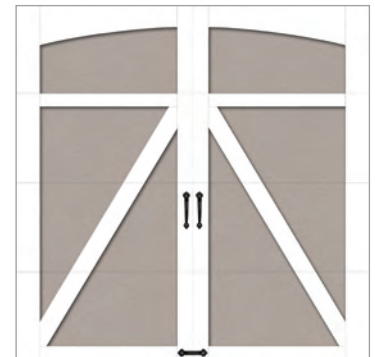

Springfield

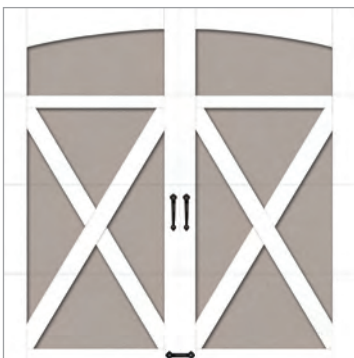

Lexington

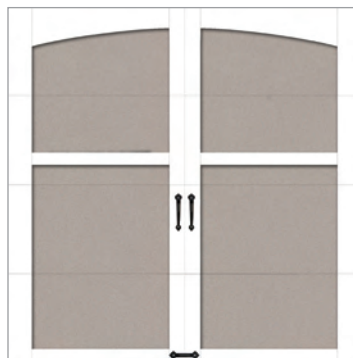

+Savannah

- + Windows added to these panel designs contain DecaTrim™ framing surrounding each window.
- All door top sections are available in arch or square design.
- Most double-car door designs are equivalent to 2 single-car doors side by side.

* Insulation values have been calculated in compliance with the Dasma TDS-163 industry standards.

Model 6100 Specifications

Door Construction

- **Model 6100 features** a four layer method of construction: Toughguard™ backer – polyurethane foam – steel facer – DecaTrim™ overlay.
- Steel door base has a two-coat, baked-on polyester finish that is virtually maintenance-free. This finish also makes an excellent base if you repaint to match the existing exterior colors of your home.
- The foamed-in-place polyurethane insulation is chemically bonded to each steel section, creating a structure with higher strength and dent resistance.
- The Toughguard™ backer is chemically bonded to the foam, creating a durable interior surface on your garage door, and one that improves the interior appeal.
- Heavy-gauge steel wraparound end caps trim-out door edges for better appearance, improved strength and to protect the insulation from damage.
- Integral foam-filled horizontal struts at the top and bottom of door sections add rigidity for long life and smooth operation – extra strength without extra weight.
- The DecaTrim™ accent overlays offer design flexibility and highly defined vertical door lines for a unique look.
- DecaTrim™ stiles are provided in white only, but a factory two-toned look can be achieved by ordering the door sections in one of the four offered colors.
- The polyurethane foam is CFC-11-free, so it's environmentally friendly.
- Sound-absorbing insulation makes the door operate quieter and eliminates wind-rattling.

- Attractive, low-profile hinges provide maximum strength between sections and add stability compared with ordinary vertical hinges. Hinges are factory installed for proper alignment and smoother door operation.
- SilentGlide™ rollers with nylon tires and solid steel shafts provide years of smooth, quiet, dependable service.
- Spring system is TorqueMaster® Plus or torsion, depending on door weight.
- An insulated door improves your energy efficiency and makes your house more green.
- Windload models available.



StyleLine™ Windows

Window divides are offered in your choice of either an insert design or a routed DecaTrim style.



Clear



Stockton III



Stockbridge



Cascade III



Arched Stockton



Waterton III

Window patterns shown are insert style on a typical single-car door. Spacing of windows may change depending on door size.

Colors



White



Taupe



Almond



Brown

Safety & Security

Decorative Hardware is available.



Warranty

Model 6100 offers a Lifetime Limited Warranty on the door against cracking, splitting, rusting through or section deterioration. Wayne-Dalton warrants the DecaTrim™ overlay of the 6100 against defects in material and workmanship for a period of two years. See dealer for complete warranty details.



www.Wayne-Dalton.com

©2012 Wayne-Dalton, a division of Overhead Door Corporation. Consistent with our policy of continuing product improvement, we reserve the right to change product specifications without notice or obligation. Item **331660** 05/12

Golden Contractor Services LLC
1320 N. Road 42 Pasco. Wa 99301
license and bonding
Washington & Oregon states
www.goldencontractorservices.com
509-531-6885 or 509-713-3885

Dealer Imprint Area